
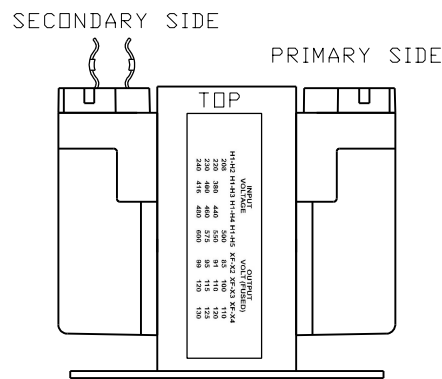


MOUNTING DIMENSIONS

Transformer Specifications	
PRIMARY VOLTAGE(S)	240 /417 /480 /600
SECONDARY VOLTAGE(S)	99 /120 /130
RATED V.A.	50
RATED FREQUENCY	50/60
INSULATION CLASS	105
AGENCY APPROVALS	UL, CSA
ESTIMATED WEIGHT	2.7 LBS

FOR TEST REQUIREMENTS SEE 411-9325F
COIL TEST PAGE

TERMINAL SCREWS ARE COMBINATION
10-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER

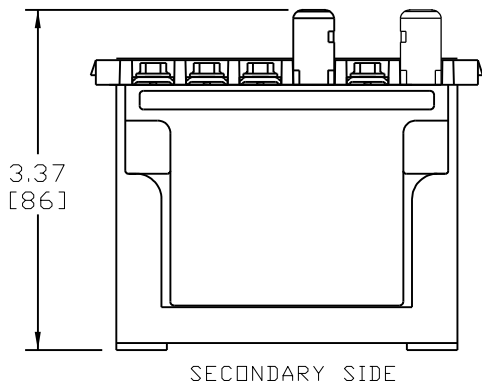

IND. BOX LABEL


50VA
PRIMARY:
240/417/480/600
SECONDARY:
99/120/130
FREQUENCY:
50/60 HZ

QTY. 1

MADE IN USA

Cat.
B050-0482-1

24135

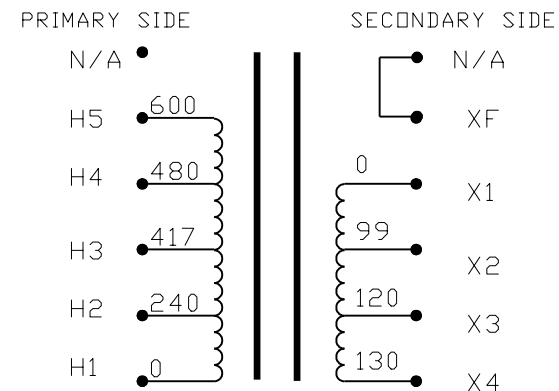

INTERNALLY JUMPERED TO FUSE TERMINAL
CONNECTION DIAGRAM

NOTE:

1. ALL MEASUREMENTS IN INCHES (MM)

PACKAGED ACCESSORIES	
1	ONE PAIR J2 JUMPERS
-	-
-	-

MICRON INDUSTRIES CORPORATION
1211 W.22nd STREET, Suite 200, OAK BROOK, ILL.
Tel. (800)664-4660, (630)516-1222 Fax (630)516-1820
www.MicronPower.com

DATE	5/08/07	DRAWN	RN	CHECKED	APPROVED
RELEASE DATE		CUSTOMER PART NO.			
MICRON PART NO.	B050-0482-1J7777A0 B050-0482-1J7777B0				
SIZE	C	SCALE	NDNE	B050-0482-1	

ImpervITRAN
U.S. PAT. NO. 3516040

SEE TABLE FOR CONNECTIONS

50 VA 50/60 HZ
TEMP CL 105 °C

OUTPUT 0.385A
VOLTS PER TABLE

24135
CAT. NO. **B050-0482-1**

X4 X3 X2 X1 XF

INPUT VOLTAGE				OUTPUT VOLTS (FUSED)		
H1-H2	H1-H3	H1-H4	H1-H5	XF-X2	XF-X3	XF-X4
208			500	85	100	110
220	380	440	550	91	110	120
230	400	460	575	95	115	125
240	416	480	600	99	120	130

REV.	DESCRIPTION	DATE
J	NEW	5/08/07
ECL	REVISIONS	