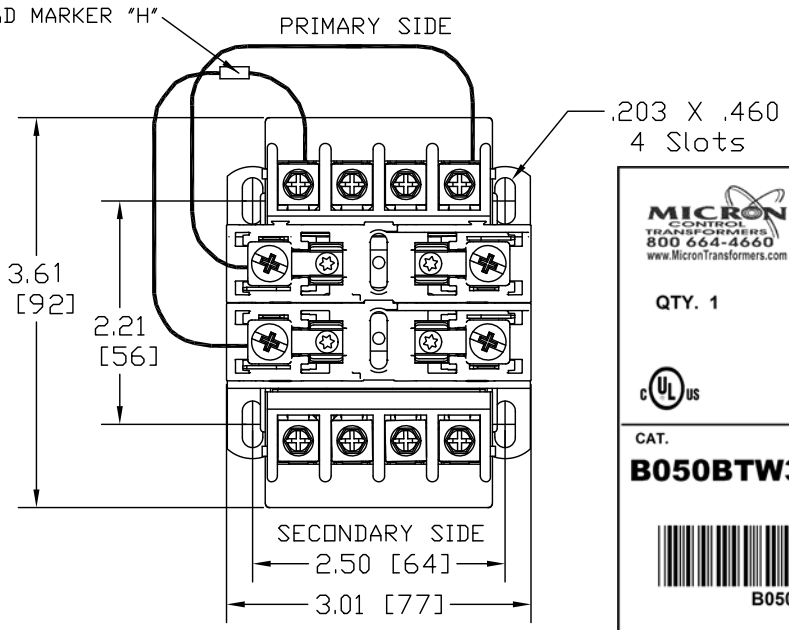

Transformer Specifications	
PRIMARY VOLTAGE(S)	230/460/575
SECONDARY VOLTAGE(S)	95/115
RATED V.A.	50
RATED FREQUENCY	50/60
INSULATION CLASS	105
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	3.2 LBS

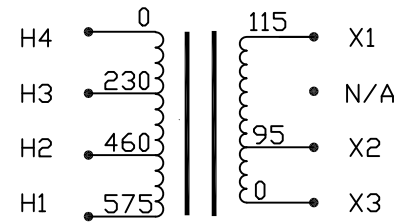

CONNECTION DIAGRAM

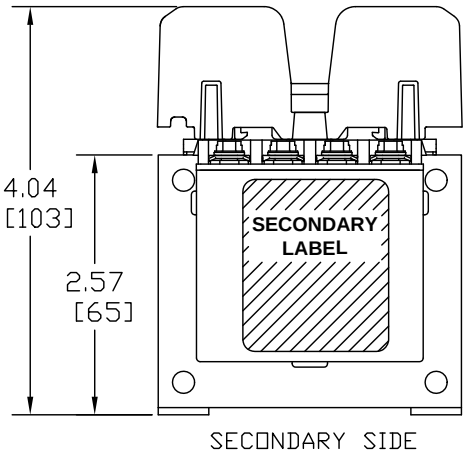

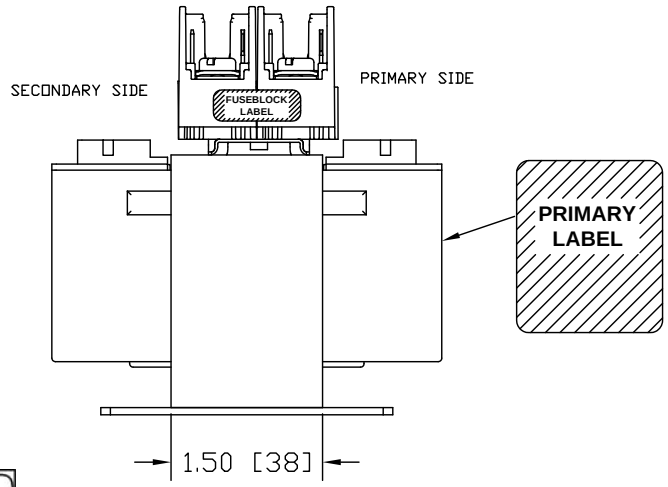

NOTES:
1. ALL MEASURMENTS IN INCHES (MM)
2. TERMINAL SCREWS ARE COMBO #8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER.
3. 2 POLE, CLASS "CC" PRIMARY FUSE BLOCK, ACCOMMODATES TWO 13/32" X 1-1/2" CLASS "CC" FUSES.

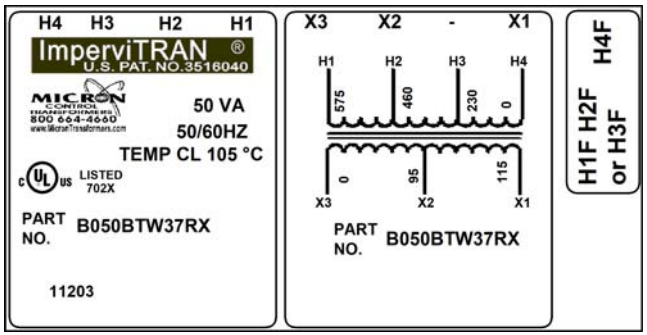

PACKAGED ACCESSORIES	
–	–
–	–

MICRON INDUSTRIES CORPORATION
CONTROL TRANSFORMER
1211 W.22nd STREET, Suite 200, OAK BROOK, ILL.
Tel. (800)664-4660, (630)516-1222 Fax (630)516-1820
www.MicronPower.com

DATE	DRAWN	CHECKED	APPROVED
3/16/20	JAW		
RELEASE DATE	CUSTOMER PART NO.		

MICRON PART NO.: B050BTW37RXA3, B050BTW37RXB3

SIZE	SCALE	
C	NONE	B050BTW37RX

ECL	REVISIONS	BY	DATE
A	I3 CONSTRUCTION AN006538	JW	3/16/20