Transformer Specifications	
PRIMARY VOLTAGE(S)	208/230/460
SECONDARY VOLTAGE(S)	115
RATED V.A.	50
RATED FREQUENCY	50/60
INSULATION CLASS	105
AGENCY APPROVALS	UL,CUL
ESTIMATED WEIGHT	2.5 LBS

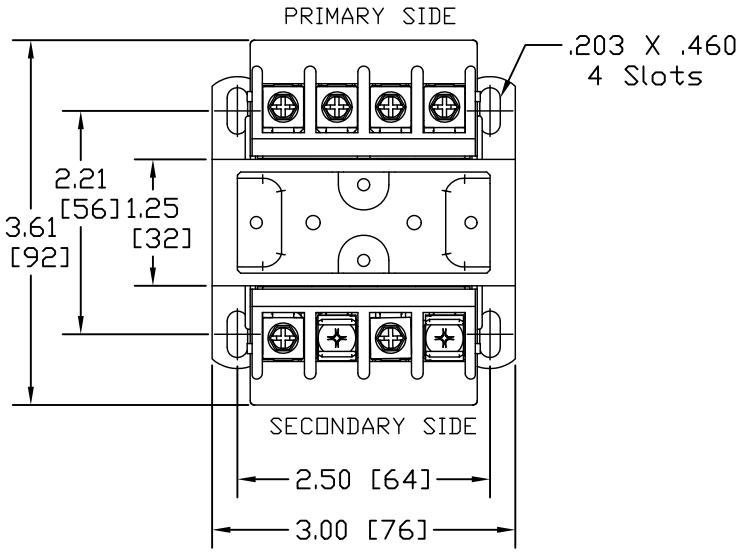



INTERNALLY JUMPERED TO FUSE TERMINAL

CONNECTION DIAGRAM

NOTES:
1. ALL MEASURMENTS IN INCHES (MM)
2. TERMINAL SCREWS ARE COMBO #8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER.
3. SECONDARY FUSE CLIP ACCOMMODATES ONE 13/32" X 1-1/2" MIDGET FUSE.

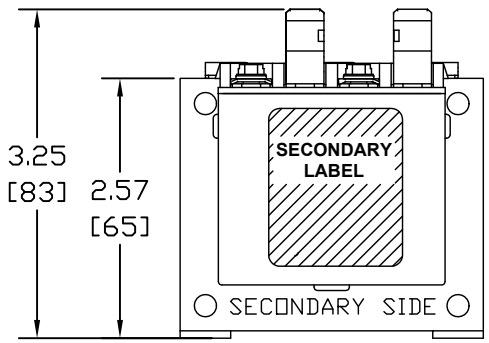

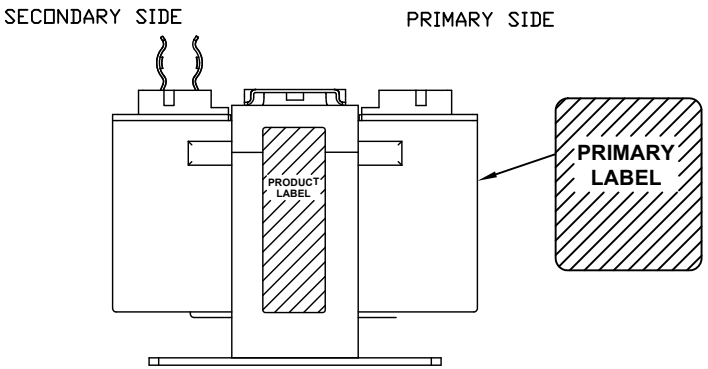

PACKAGED ACCESSORIES	
1	
-	-

MICRON CONTROL TRANSFORMER
MICRON INDUSTRIES CORPORATION
1211 W.22nd STREET, Suite 200, OAK BROOK, ILL.
Tel. (800)664-4660, (630)516-1222 Fax (630)516-1820
www.MicronPower.com

DATE	DRAWN	CHECKED	APPROVED
12/31/07	J.G.V		
RELEASE DATE	CUSTOMER PART NO.		

MICRON PART NO.: B050MBT13XKA3, B050MBT13XKB3

SIZE	SCALE	
C	NONE	B050MBT13XK

A	I3 CONSTRUCTION	AN00XXXX	XX	XXXX
ECL	REVISIONS		BY	DATE