Transformer Specifications	
PRIMARY VOLTAGE(S)	230x460 (TRIPLE RATED)
SECONDARY VOLTAGE(S)	115
RATED V.A.	75
RATED FREQUENCY	50/60
INSULATION CLASS	105
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	3.4 LBS

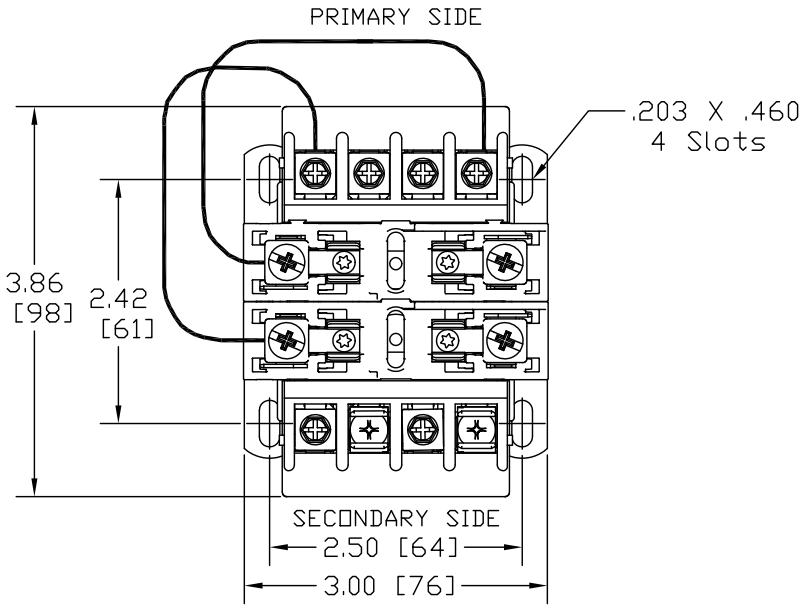

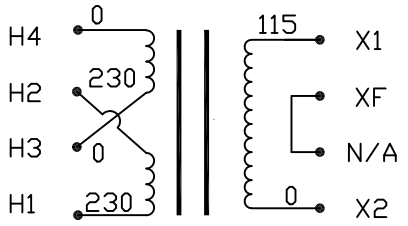

INTERNALLY JUMPERED TO FUSE TERMINAL

CONNECTION DIAGRAM

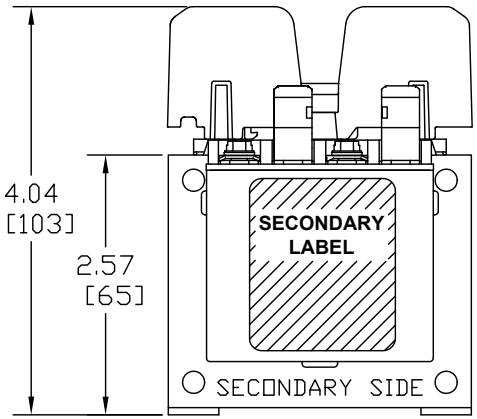

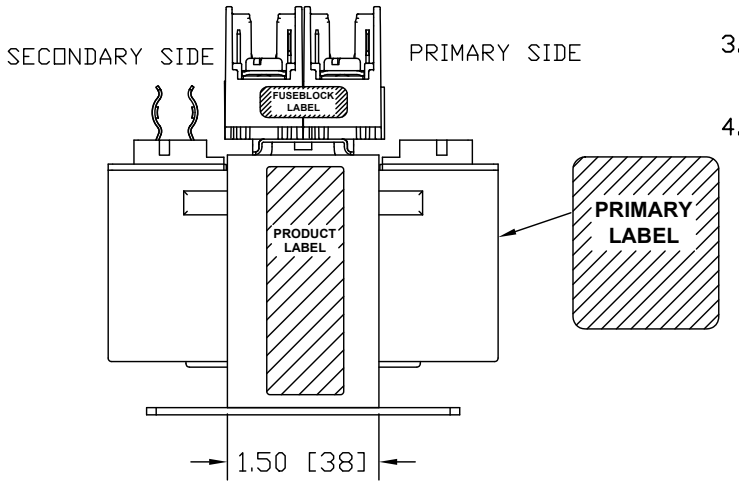

NOTES:
1. ALL MEASURMENTS IN INCHES (MM)
2. TERMINAL SCREWS ARE COMBO #8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER.
3. 2 POLE, CLASS "CC" PRIMARY FUSE BLOCK, ACCOMMODATES TWO 13/32" X 1-1/2" CLASS "CC" FUSES.
4. SECONDARY FUSE CLIP ACCOMMODATES ONE 13/32" X 1-1/2" MIDGET FUSE.

PACKAGED ACCESSORIES	
1	ONE PAIR OF JUMPERS
-	-

MICRON CONTROL TRANSFORMER
MICRON INDUSTRIES CORPORATION
777 CHURCH ROAD - ELMHURST, IL 60126
Tel. (800)664-4660, (630)516-1222 Fax (630)516-1820
www.MicronTransformers.com

DATE	DRAWN	CHECKED	APPROVED
10/29/07	J.G.V		
RELEASE DATE	CUSTOMER PART NO.		

MICRON PART NO.
B075BTZ13RBA3
B075BTZ13RBB3

SIZE	SCALE	
C	NONE	B075BTZ13RB

A	I3 CONSTRUCTION ANOOXXXX	XX	XXXX
ECL	REVISIONS	BY	DATE