Transformer Specifications	
PRIMARY VOLTAGE(S)	575 TRIPLE RATED
SECONDARY VOLTAGE(S)	115
RATED V.A.	100
RATED FREQUENCY	50/60
INSULATION CLASS	105
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	4.2 LBS

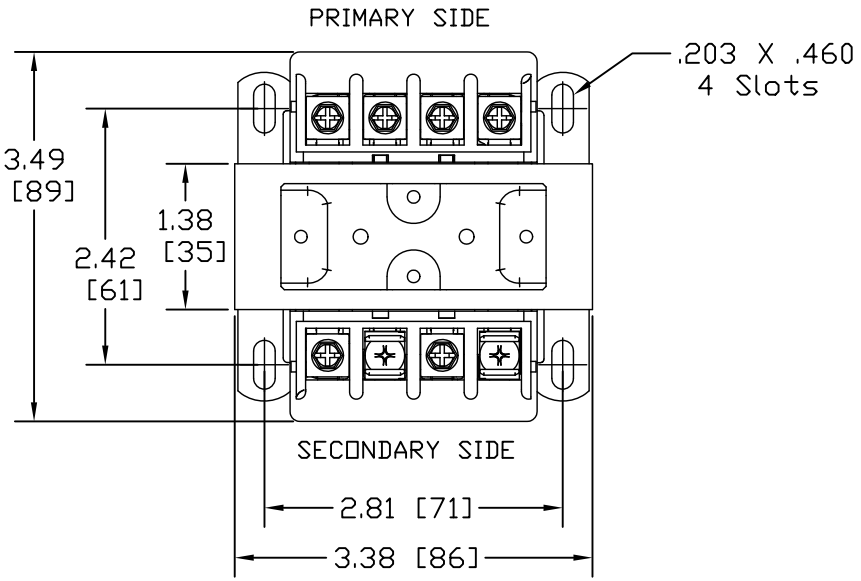

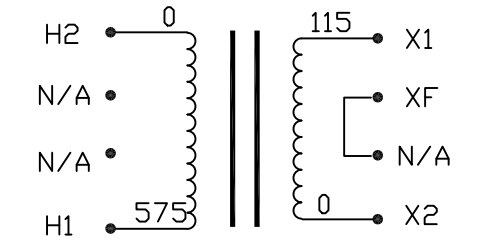

SEC.FUSECLIPS INTERNALLY JUMPERED

CONNECTION DIAGRAM

NOTES:
1. ALL MEASURMENTS IN INCHES (MM)
2. TERMINAL SCREWS ARE COMBO #8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER.
3. SECONDARY FUSE CLIP ACCOMMODATES ONE 13/32" X 1-1/2" MIDGET FUSE.

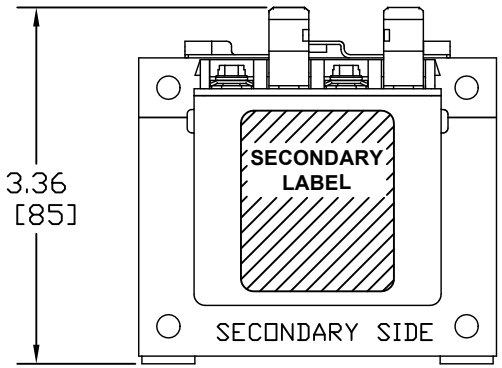

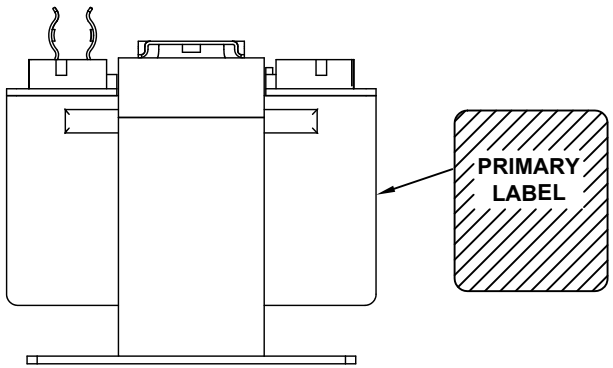

PACKAGED ACCESSORIES	
1	
–	–

A	I3 CONSTRUCTION AN00XXXX	XX	XXXX
ECL	REVISIONS	BY	DATE

MICRON INDUSTRIES CORPORATION
1211 W.22nd STREET, Suite 200, OAK BROOK, ILL.
Tel. (800)664-4660, (630)516-1222 Fax (630)516-1820
www.MicronPower.com

DATE	DRAWN	CHECKED	APPROVED
05/27/09	RN		
RELEASE DATE	CUSTOMER PART NO.		

MICRON PART NO.: B100WZ13XKA3, B100WZ13XKB3

SIZE	SCALE	
C	NONE	B100WZ13XK