




PRIMARY SIDE


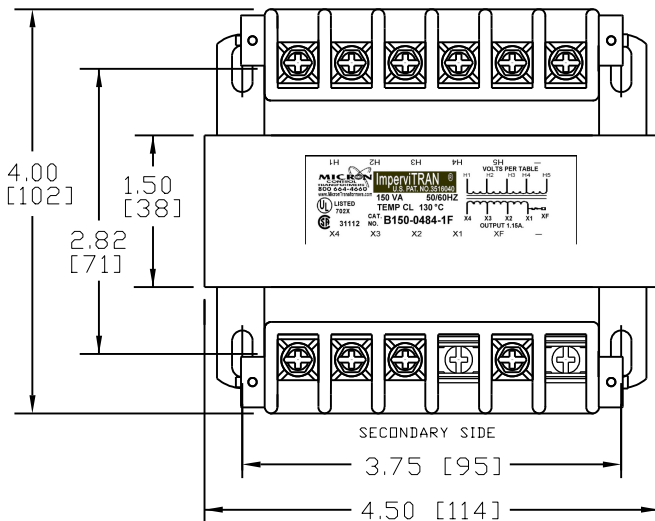


Transformer Specifications	
PRIMARY VOLTAGE(S)	230/400/460/575 (UNIVERSAL)
SECONDARY VOLTAGE(S)	95/115/125
RATED V.A.	150
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	7.9 LBS

TEST REQUIREMENTS		
WINDING	H1-H2-H3-H4-H5	X1-X2-X3-X4
D.C.VOLTS	240-416-480-600	108.1-130.9-141.8
LOAD VOLTS	240-416-480-600	99-120-130
F.L. AMPS	0.788/0.315	1.154
HI-POT	3000V	1800V
EXCITING AMPS	0.15AMPS @ 600 VOLTS, 50HZ	
EXCITING WATTS	17.0	

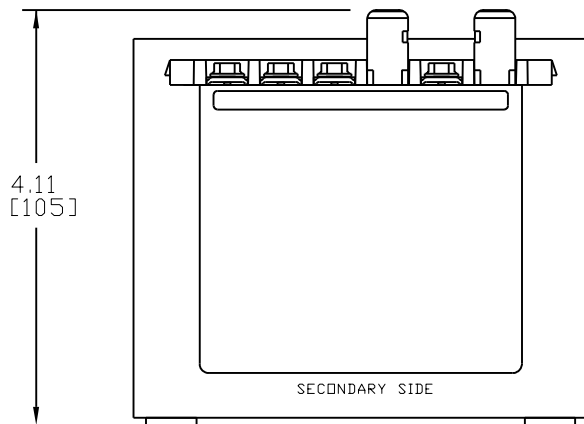


SECONDARY SIDE PRIMARY SIDE

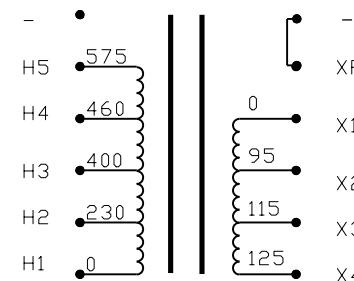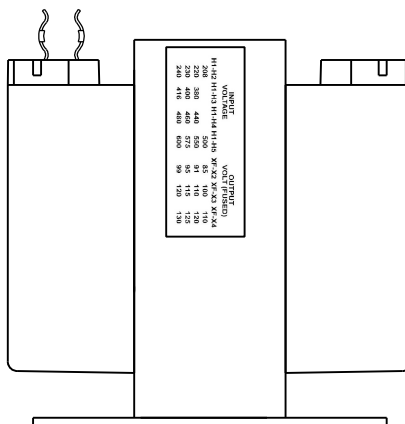

INTERNALLY JUMPERED TO FUSE TERMINAL CONNECTION DIAGRAM

NOTES:

1. TORQUE CONNECTIONS TO 30 LB-IN
2. 10-32 PHILLIP SCREW TRUSS SLOT
3. FUSE CLIPS TO ACCOMADATE 13/32-1 1/2"

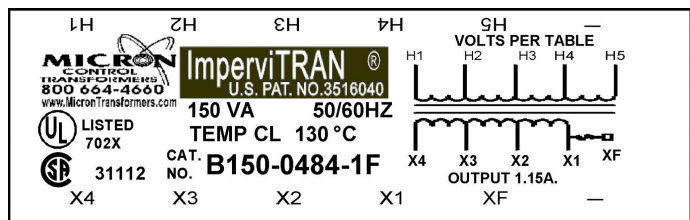

INPUT VOLTAGE		OUTPUT VOLT (FUSED)				
H1-H2	H1-H3	H1-H4	H1-H5	XF-X2	XF-X3	XF-X4
208			500	85	100	110
220	380	440	550	91	110	120
230	400	460	575	95	115	125
240	416	480	600	99	120	130

PACKAGED ACCESSORIES	
1	
-	-
-	-

MICRON INDUSTRIES CORPORATION
777 CHURCH ROAD, ELMHURST, IL 60126
CONTROL TRANSFORMER Tel. (800)664-4660, (630)516-1222, Fax (630)516-1820
www.MicronTransformers.com

DATE 1/21/08 DRAWN J.G.V. CHECKED APPROVED
RELEASE DATE CUSTOMER PART NO.
MICRON PART NO. B150-0484-1FJ7777A0 B150-0484-1FJ7777B0
SIZE SCALE C NONE
B150-0484-1F

J	REVISED	J.V	1/21/08
ECL	REVISIONS	BY	DATE