

MICRON CONTROL TRANSFORMERS
800 664-4660
www.MicronTransformers.com

150VA
PRIMARY:
208/230/460

QTY. 1

SECONDARY:
24/115


FREQUENCY:
50/60Hz

MADE IN USA



CAT.
B150-2003-1F

49194

Transformer Specifications	
PRIMARY VOLTAGE(S)	208/230/460 (TRIPLE)
SECONDARY VOLTAGE(S)	24/115
RATED V.A.	150
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL,CUL
ESTIMATED WEIGHT	8.5 LBS

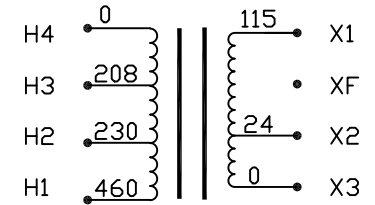

CONNECTION DIAGRAM

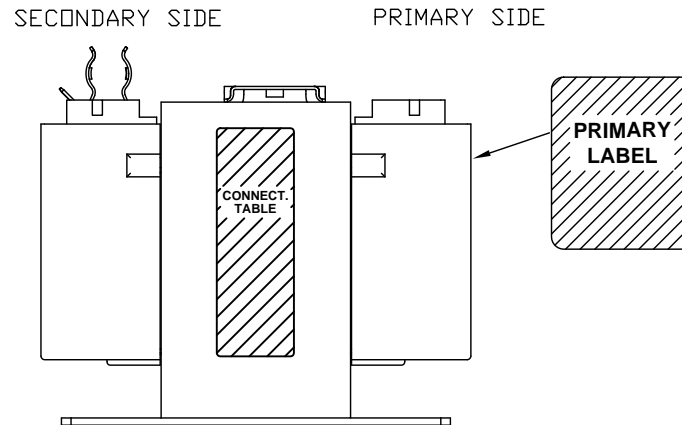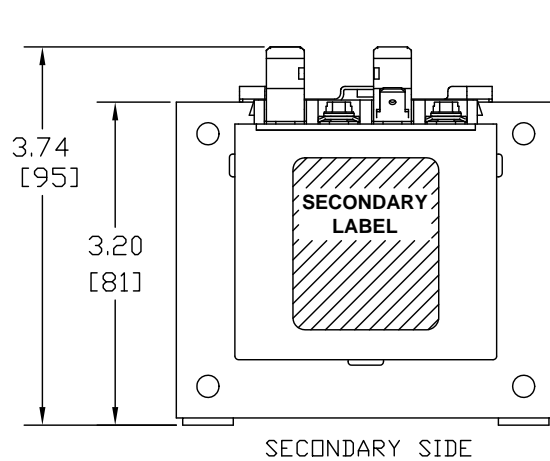

NOTES:

1. ALL MEASUREMENTS IN INCHES (MM)
2. TERMINAL SCREWS ARE COMBO #8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER.
3. SECONDARY FUSE CLIP ACCOMMODATES ONE 13/32" X 1-1/2" MIDGET FUSE.

	INPUT VOLTAGE		OUTPUT VOLTAGE	
	H4-H3	H4-H2	H4-H1	XF-X1
	--	240	480	25 120
	208	230	460	24 115
	200	220	440	23 110

NOTE: IF BOTH OUTPUTS ARE USED SIMULTANEOUSLY, REPLACE XF WITH X3 AND FUSE THROUGH X2 AND X1 IF REQUIRED

H4	H3	H2	H1	X3	X2	XF	X1
ImperviTRAN U.S. PAT. NO. 3,516,040				SEE TABLE FOR CONNECTIONS			
 MICRON CONTROL TRANSFORMERS 800 664-4660 www.MicronPower.com 150 VA 50/60 HZ LISTED 702X TEMP CL 130 °C CAT. NO. B150-2003-1F 49194				 CAT. NO. B150-2003-1F			

PACKAGED ACCESSORIES

1	
-	-

MICRON INDUSTRIES CORPORATION
1211 V.22nd STREET, Suite 200, Oak Brook, IL
Tel: (800)664-4660, (630)516-1222 Fax: (630)516-1820
www.MicronPower.com

DATE	11/18/19	DRAWN	JAW	CHECKED		APPROVED	
RELEASE DATE		CUSTOMER PART NO.					

MICRON PART NO. B150-2003-1FA3
B150-2003-1FB3

A	I3 CONSTR/BASE	AN006466	JW	11/18/19	SIZE	SCALE	
ECL	REVISIONS		BY	DATE	C	NONE	

B150-2003-1F