
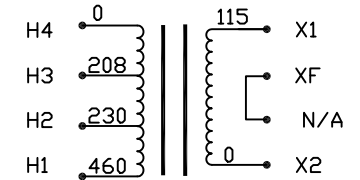




Transformer Specifications	
PRIMARY VOLTAGE(S)	208/230/460
SECONDARY VOLTAGE(S)	115
RATED V.A.	150
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	5.6 LBS

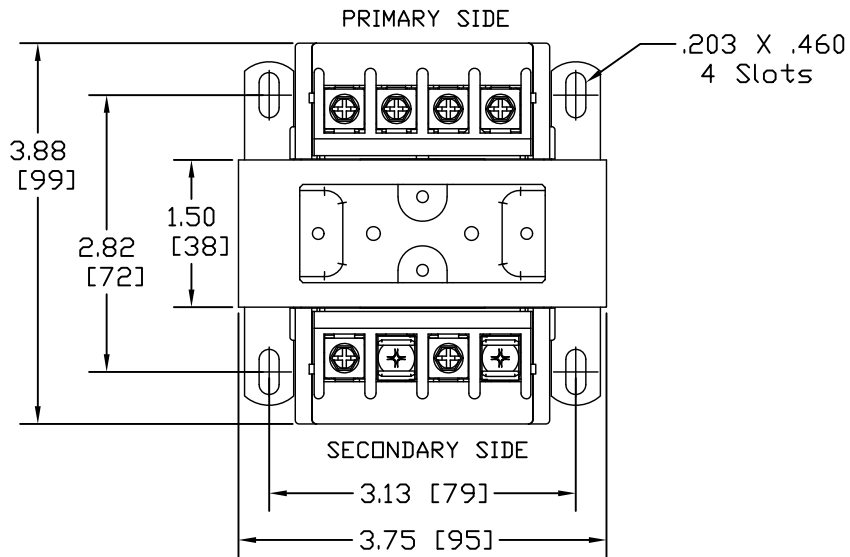

INTERNALLY JUMPERED TO FUSE TERMINAL  
CONNECTION DIAGRAM

NOTES:

1. ALL MEASUREMENTS IN INCHES (MM)
2. TERMINAL SCREWS ARE COMBO #8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER.
3. SECONDARY FUSE CLIP ACCOMMODATES ONE 13/32" X 1-1/2" MIDGET FUSE.

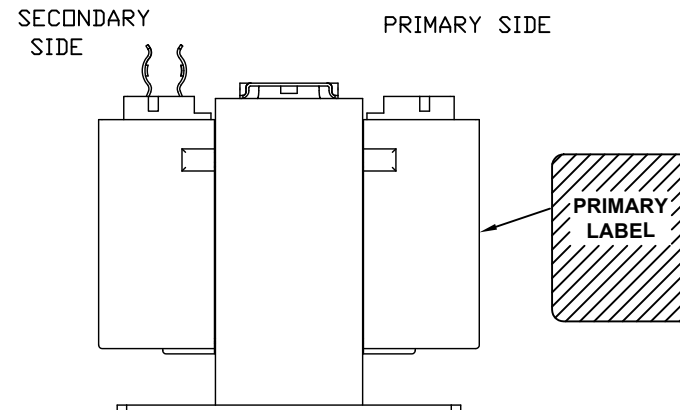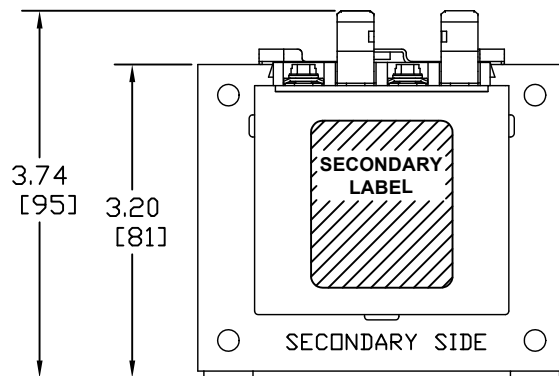

PACKAGED ACCESSORIES	
-	-
-	-

**MICRON** INDUSTRIES CORPORATION  
1211 W 22nd STREET, SUITE 200, DAK BROOK, ILL.  
Tel. (800)664-4660, (630)516-1222 Fax (630)516-1920  
www.MicronPower.com

DATE 9/18/07 DRAWN J.G.V CHECKED APPROVED

RELEASE DATE CUSTOMER PART NO.

MICRON PART NO. B150MBT13XKFA3  
B150MBT13XKFB3

SIZE SCALE C NONE B150MBT13XKF

A	I3 CONSTRUCTION	AN00XXXX	XX	XXXX
ECL	REVISIONS	BY	DATE	