


CONNECTION DIAGRAM



PROVIDED WITH SAFE TOUCH TERMINAL COVERS
NO INTEGRAL FUSING CAPABILITY.

DIMENSIONS							APPROX. WT. LBS (KG)
	A	B	C	D	E	MTG. SLOTS	
INCHES (MM)	7.75 (199)	6.75 (171)	6.25 (159)	5.00 (127)	6.13 (158)	0.313X0.906 (8.0X23.0)	

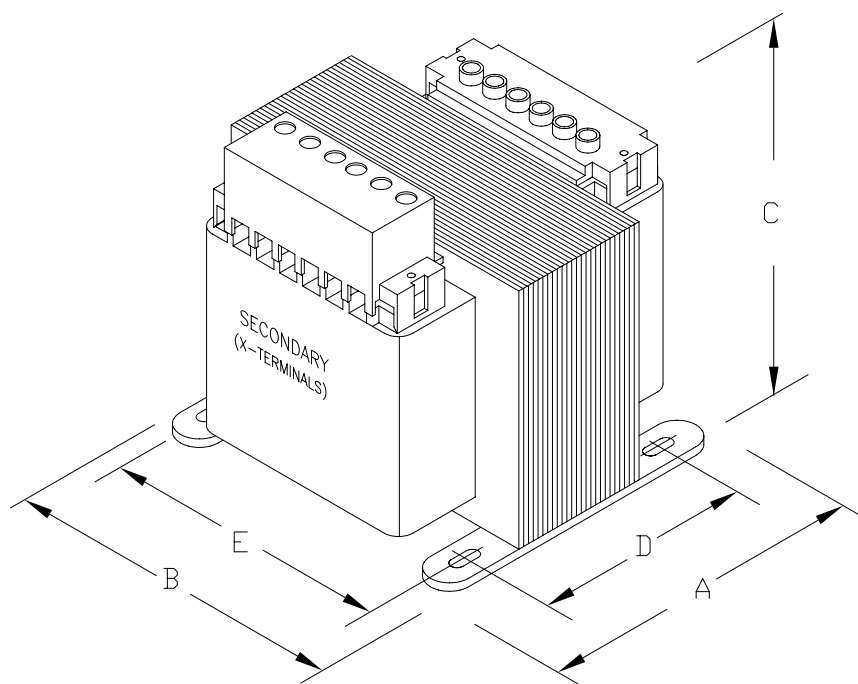

MICRON INDUSTRIES CORPORATION
777 CHURCH ROAD - ELMHURST, IL 60126
Tel. (800) 664-4660, (630) 516-1222 Fax (630) 516-1820
www.MicronTransformers.com

CAT. NO. B1K0-2268-GAH		CONST. ENCAPSULATED				UL LISTED	
		MODEL GLOBALTRAN					
RATING							SF CERTIFIED
OUTPUT AMPS	41.7/8.3/4.3	PRIMARY V	208/230/400/460/575		TEMP. CLASS	CE	
VA	1000	SECONDARY V	24/115/230		180°C		REVISION G
						IEC 61558	