


Transformer Specifications	
PRIMARY VOLTAGE(S)	230/460/575 (TRIPLE)
SECONDARY VOLTAGE(S)	95/115
RATED V.A.	1000
RATED FREQUENCY	50/60
INSULATION CLASS	180
AGENCY APPROVALS	UL, CSA
ESTIMATED WEIGHT	31.8 LBS


PRIMARY SIDE SECONDARY SIDE

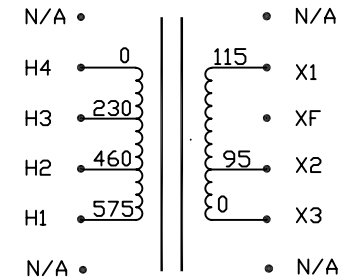


CONNECTION DIAGRAM

NOTE:
1. ALL MEASUREMENTS IN INCHES (MM)


SECONDARY SIDE

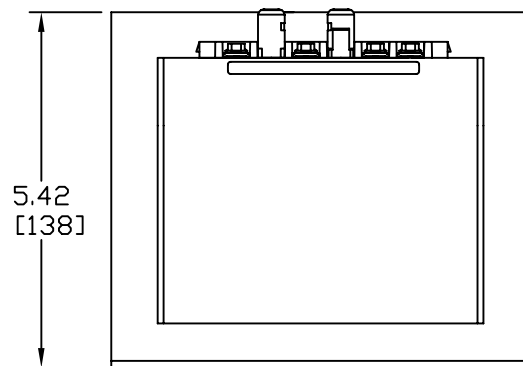

SECONDARY SIDE PRIMARY SIDE

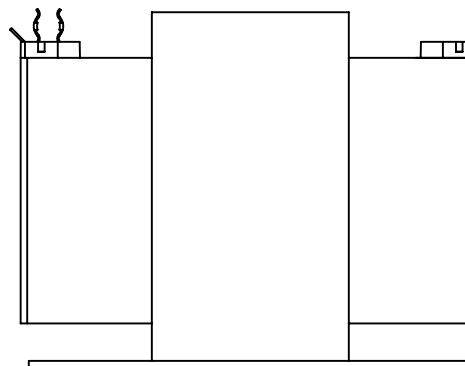

LABEL 1

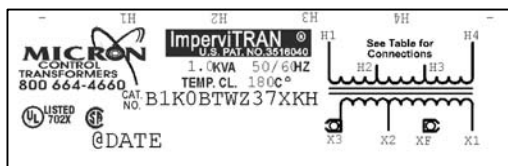

LABEL 2

INPUT VOLTAGE			OUTPUT VOLTAGE	
H4-H3	H4-H2	H4-H1	XF-X1	XF-X2
220	440	550	110	90
230	460	575	115	95
240	480	600	120	100
	X3	X2	XF	X1

PACKAGED ACCESSORIES

1	
-	-
-	-

MICRON CONTROL TRANSFORMER **MICRON INDUSTRIES CORPORATION**
 777 CHURCH ROAD ELMHURST, IL 60126
 Tel. (800)664-4660, (630)516-1222 Fax (630)516-1820
 www.MicronTransformers.com

DATE	11/7/07	DRAWN	J.G.V.	CHECKED		APPROVED	
RELEASE DATE		CUSTOMER		PART. NO.			
FINAL ASST.							
SIZE	SCALE	B1K0BTWZ37XKH					
C	NONE						