




| Transformer Specifications | |
|----------------------------|-------------|
| PRIMARY VOLTAGE(S) | 208/230/460 |
| SECONDARY VOLTAGE(S) | 115 |
| RATED V.A. | 1500 |
| RATED FREQUENCY | 50/60 |
| INSULATION CLASS | 130 |
| AGENCY APPROVALS | UL, CSA |
| ESTIMATED WEIGHT | 53.9 LBS |

FOR TEST REQUIREMENTS SEE 415-0436
COIL TEST PAGE

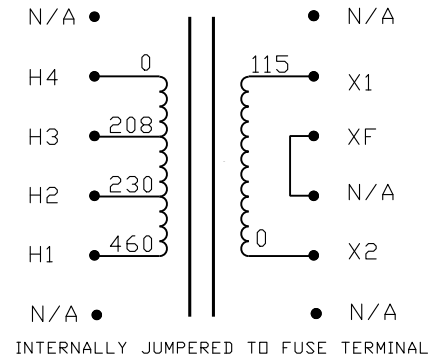

CONNECTION DIAGRAM

10-32 PHIL-SLOT-5/16" HEX WITH SEMS WASHER

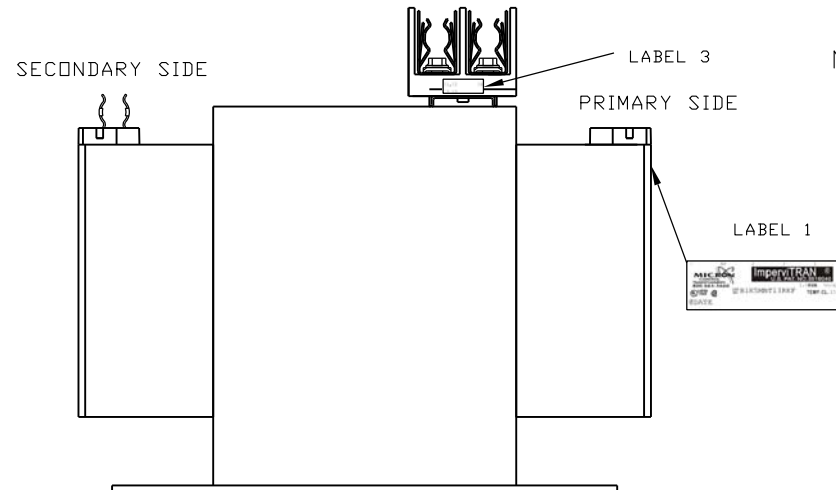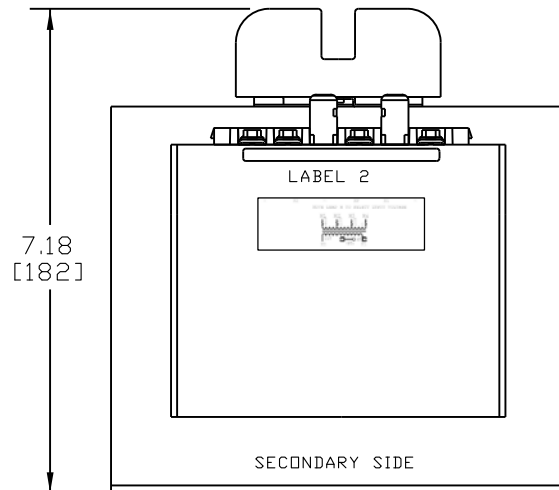


NOTE:
1. ALL MEASUREMENTS IN INCHES (MM)

| PACKAGED ACCESSORIES | |
|----------------------|--|
| 1 | |
| - | |
| - | |
| - | |

| | | | |
|---|--|-------------------|--------|
| MICRON INDUSTRIES CORPORATION 1211 W 22nd STREET, Suite 200, DAK BROOK, ILL. Tel. (800)664-4660, (630)516-1222 Fax (630)516-1820 www.MicronPower.com | | | |
| DATE | 10/8/08 | DRAWN | J.G.V. |
| RELEASE DATE | | CHECKED | |
| | | CUSTOMER PART NO. | |
| MICRON PART NO. | B1K5MBT13RKFA7777A0 B1K5MBT13RKFA7777B0 | | |
| SIZE | C | SCALE | NONE |
| B1K5MBT13RK F | | | |

LABEL 1

LABEL 2

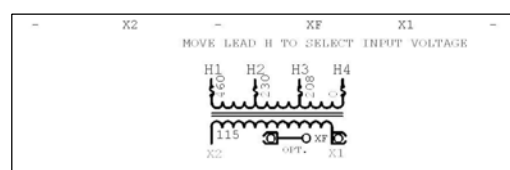

| | | |
|------------------------|------|---------|
| DRAWING UPDATED | J.V. | 7/23/13 |
| A REDRAW IN NEW FORMAT | J.V. | 10/8/08 |
| ECL REVISIONS | BY | DATE |