


Transformer Specifications	
PRIMARY VOLTAGE(S)	208/230/460 (TRIPLE)
SECONDARY VOLTAGE(S)	24/115
RATED V.A.	200
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL,CUL
ESTIMATED WEIGHT	9.5 LBS



PRIMARY SIDE SECONDARY SIDE

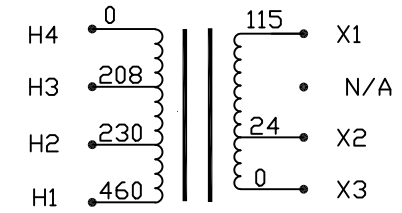

CONNECTION DIAGRAM

NOTES:

1. ALL MEASUREMENTS IN INCHES (MM)
2. TERMINAL SCREWS ARE COMBO #8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER.
3. 2 POLE, CLASS "CC" PRIMARY FUSE BLOCK, ACCOMMODATES TWO 13/32" X 1-1/2" CLASS "CC" FUSES.
4. SECONDARY FUSE CLIP ACCOMMODATES ONE 13/32" X 1-1/2" MIDGET FUSE.

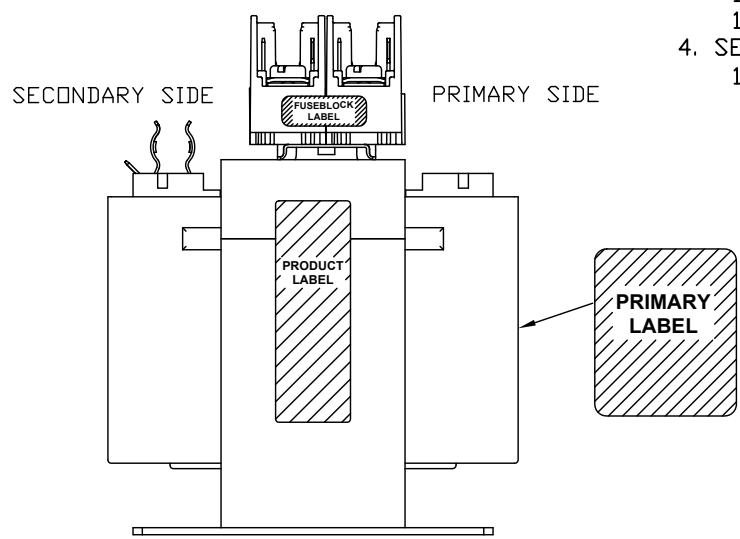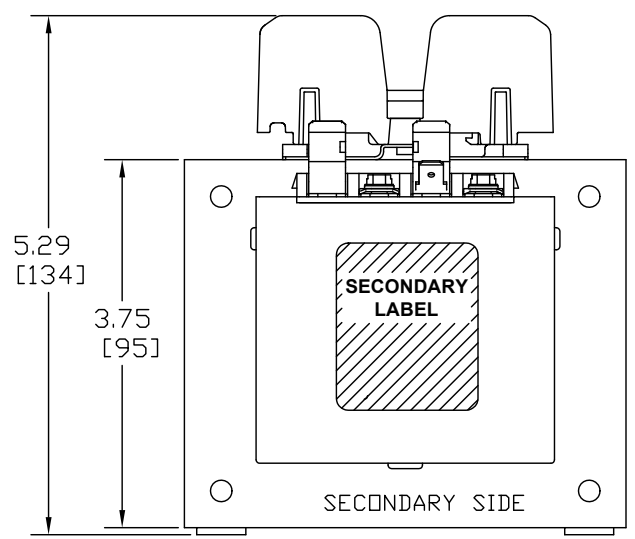

PACKAGED ACCESSORIES			
1			
-			

**MICRON** INDUSTRIES CORPORATION  
777 CHURCH ROAD, ELMHURST, IL 60126  
Tel: (800)664-1660, (630)516-1222 Fax: (630)516-1820  
www.MicronTransformers.com

DATE	3/24/08	DRAWN	J.G.V	CHECKED		APPROVED	
RELEASE DATE		CUSTOMER PART NO.					
MICRON PART NO.		B200-2004-8FA3		B200-2004-8FB3			
SIZE	C	SCALE	NONE	B200-2004-8F			

A	I3 CONSTRUCTION	AN00XXXX	XX	XXXX			
ECL	REVISIONS		BY	DATE			