


CONNECTION DIAGRAM

CONNECTION TABLE

PRIMARY		SECONDARY			
VOLT	TERM.	VOLT	TERM.	VOLT	TERM.
200	H4-H3	23	X3-X2	110	X3-X1
208	H4-H3	24	X3-X2	115	X3-X1
220	H4-H2	23	X3-X2	110	X3-X1
230	H4-H2	24	X3-X2	115	X3-X1
240	H4-H2	25	X3-X2	120	X3-X1
440	H4-H1	23	X3-X2	110	X3-X1
460	H4-H1	24	X3-X2	115	X3-X1
480	H4-H1	25	X3-X2	120	X3-X1

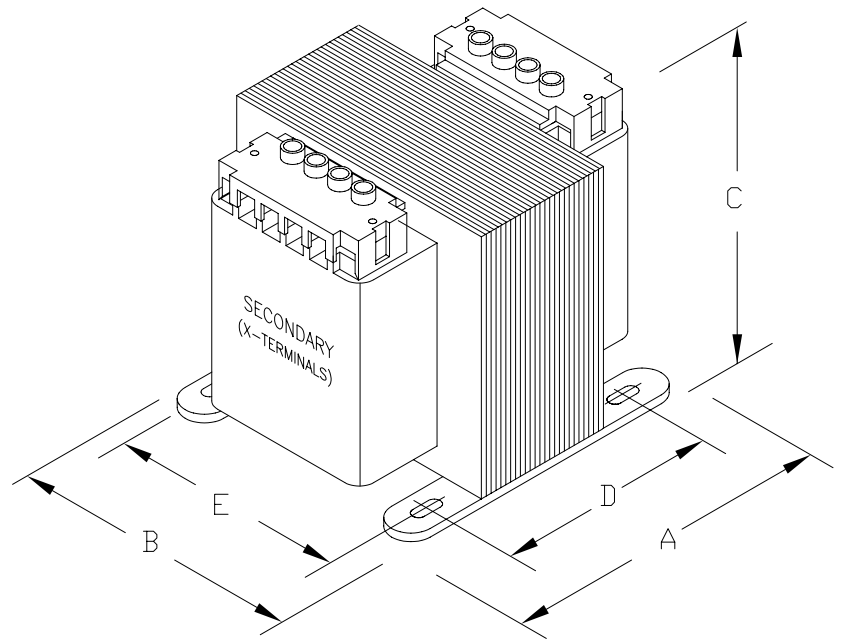

PROVIDED WITH SAFE TOUCH TERMINAL COVERS.
NO INTEGRAL FUSING CAPABILITY.

DIMENSIONS

APPROX. WT.
LBS
(KG)

	A	B	C	D	E	MTG. SLOTS
INCHES	4.38	4.50	4.00	3.44	3.75	0.203X0.460
(MM)	(111)	(114)	(102)	(87)	(95)	(5.1X11.7)



MICRON INDUSTRIES CORPORATION
777 CHURCH ROAD - ELMHURST, IL 60126
Tel. (800) 664-4660, (630) 516-1222 Fax (630) 516-1820
www.MicronTransformers.com

CAT.NO. **B200-2105-GAF**

CONST. **ENCAPSULATED**

MODEL **GLOBALTRAN**

LISTED

RATING

CERTIFIED

OUTPUT AMPS	8.33/1.74	PRIMARY V	220/220/440, 208/230/460, 240/480	TEMP. CLASS	HZ
VA	200	SECONDARY V	23/110, 24/115, 25/120	130°C	50/60
					REVISION G

IEC 61558