




Transformer Specifications	
PRIMARY VOLTAGE(S)	208/230/460
SECONDARY VOLTAGE(S)	115
RATED V.A.	200
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	9.1 LBS



INTERNALLY JUMPERED TO FUSE TERMINAL
CONNECTION DIAGRAM

NOTES:

1. ALL MEASUREMENTS IN INCHES (MM)
2. TERMINAL SCREWS ARE COMBO #8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER.
3. 2 POLE, CLASS "CC" PRIMARY FUSE BLOCK, ACCOMMODATES TWO 13/32" X 1-1/2" CLASS "CC" FUSES.
4. SECONDARY FUSE CLIP ACCOMMODATES ONE 13/32" X 1-1/2" MIDGET FUSE.

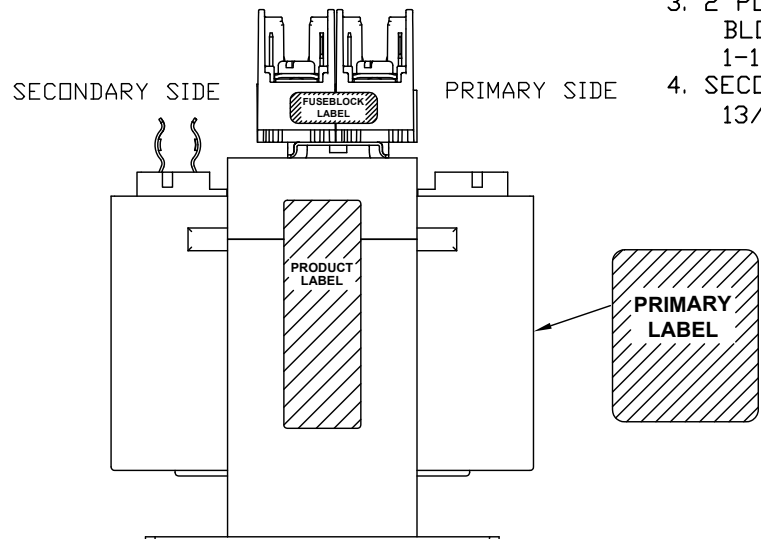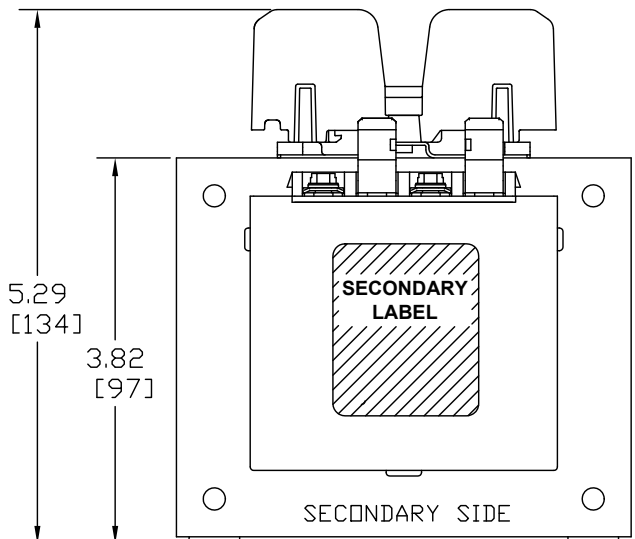

PACKAGED ACCESSORIES	
1	
-	

MICRON INDUSTRIES CORPORATION
 777 CHURCH ROAD, ELMHURST, IL 60126
 Tel. (800)664-4660, (630)316-1222 Fax (630)316-1820
 www.MicronTransformers.com

DATE	1/4/08	DRAWN	J.G.V.	CHECKED		APPROVED	
RELEASE DATE		CUSTOMER		PART NO.			
DATE		MICRON		PART NO.			
SIZE	C	SCALE	NONE				

A	13 CONSTRUCTION	AN00XXXX	XX	XXXX
ECL	REVISIONS		BY	DATE

B200MBT13RKFA3
 B200MBT13RKF B3
 B200MBT13RKF