
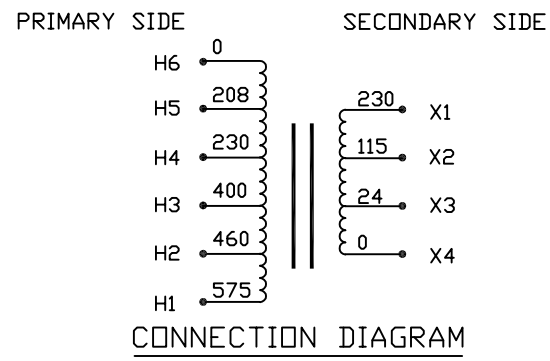
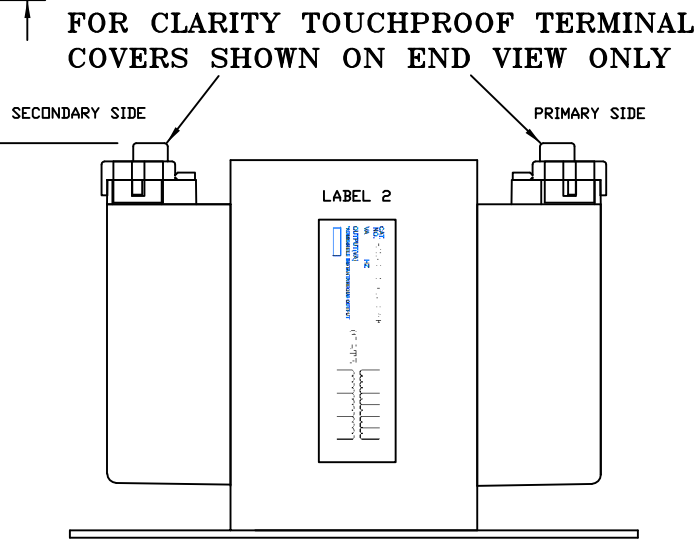


Transformer Specifications	
PRIMARY VOLTAGE(S)	208/230/400/460/575
SECONDARY VOLTAGE(S)	24/115/230
RATED V.A.	250
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	13.1 LBS

TEST REQUIREMENTS		
WINDING	H6-H5-H4-H3-H2-H1	X4-X3-X2-X1
D.C. VOLTS	208.3-229.8-399.9-459.7-575	25.7-123.6-245.6
LOAD VOLTS	208-230-400-460-575	24-115-230
F.L. AMPS	1.387/0.555	10.42/2.174/1.087
HI-POT	4800V	3000V
EXCITING AMPS	0.37AMPS @ 575 VOLTS, 50HZ	
EXCITING WATTS	30.0	

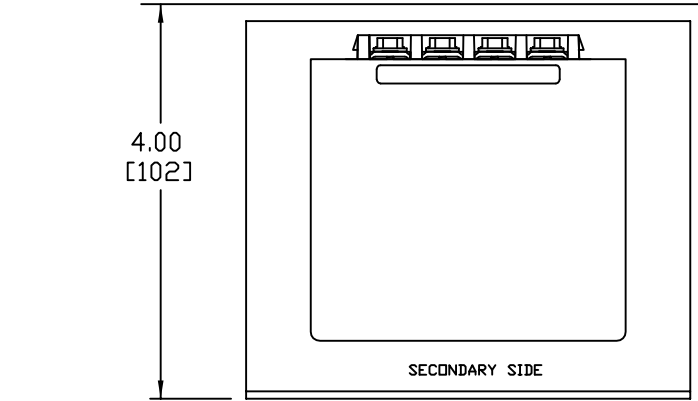

NOTE:
1. ALL MEASUREMENTS IN INCHES (MM)

PACKAGED ACCESSORIES	
1	
-	
-	

LABEL 1

LABEL 2

CAT. NO. B250-2263-GAF
 VA 250 VA HZ 50/60
 OUTPUT(VA) 250 VA
 *ADMISSIBLE INSTANTANEOUS OUTPUT
 DATE

A	FORMAT REVISED	AN03744	J.V	6/9/09
ECL	REVISIONS		BY	DATE

MICRON INDUSTRIES CORPORATION
 777 CHURCH ROAD - ELMHURST, IL 60126
 Tel: (800)664-4660, (630)516-1222 Fax: (630)516-1820
 www.MicronTransformers.com

DATE 6/9/09 DRAWN J.G.V CHECKED APPROVED
 RELEASE DATE CUSTOMER PART NO.
 MICRON PART NO. B250-2263-GAFA7777A0
 B250-2263-GAFA7777B0
 SIZE C SCALE NONE
 NONE B250-2263-GAF