

**MICRON**  
CONTROL  
TRANSFORMERS  
800 664-4660  
www.MicronTransformers.com

50 VA  
**PRIMARY:**  
230/460/575

**SECONDARY:**  
95/115

**FREQUENCY:**  
50/60Hz

QTY. 1

LISTED  
702X


MADE IN USA

CAT.  
**B050BTW37XX**

B050BTW37XX

42193


Transformer Specifications	
PRIMARY VOLTAGE(S)	230/460/575
SECONDARY VOLTAGE(S)	95/115
RATED V.A.	50
RATED FREQUENCY	50/60
INSULATION CLASS	105
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	3.2 LBS

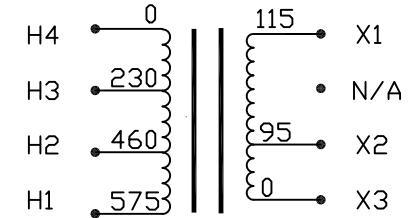

CONNECTION DIAGRAM


NOTES:

1. ALL MEASUREMENTS IN INCHES (MM)
2. TERMINAL SCREWS ARE COMBO #8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER.

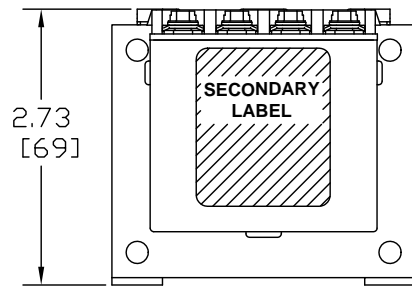

SECONDARY SIDE

PRIMARY SIDE

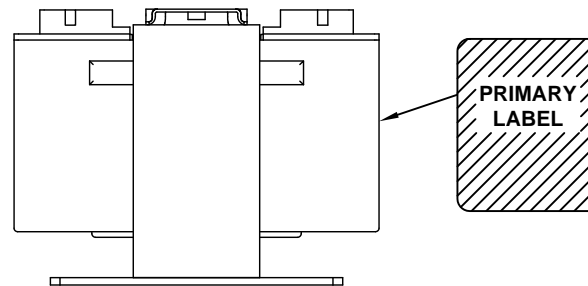

SECONDARY SIDE

H4	H3	H2	H1	-	X3	X2	X1	
<b>ImperviTRAN</b> U.S. PAT. NO. 3518040					X4	X3	X2	X1
<b>MICRON</b> CONTROL TRANSFORMERS 800 664-4660 www.MicronTransformers.com					575	460	230	0
50 VA 50/60HZ TEMP CL 105 °C					0	95	115	
LISTED 702X					X3	X2	X1	
PART NO. <b>B050BTW37XX</b>					PART NO. <b>B050BTW37XX</b>			
42193								

PACKAGED ACCESSORIES			
-	-		

**MICRON**  
CONTROL  
TRANSFORMER

**MICRON INDUSTRIES CORPORATION**  
1211 W. 22nd STREET, Suite 200, DAK BROOK, ILL.  
Tel. (800)664-4660, (630)516-1222 Fax (630)516-1820  
www.MicronPower.com

DATE	10/17/19	DRAWN	RF	CHECKED	APPROVED
RELEASE DATE		CUSTOMER PART NO.			
MICRON PART NO.		B050BTW37XXA3			
		B050BTW37XXB3			
A	I3 CONSTRUCTION	AN006423	RF	10/17/19	SIZE C SCALE NONE
ECL	REVISIONS		BY	DATE	B050BTW37XX