

MICRON CONTROL TRANSFORMERS
800 664-4660
www.MicronTransformers.com

QTY. 1

200 VA
PRIMARY:
208/277

SECONDARY:
120

FREQUENCY:
50Hz / 60Hz

UL US




MADE IN USA

CAT.
B200MQ15RKF

B200MQ15RKF


04204

Transformer Specifications	
PRIMARY VOLTAGE(S)	208/277
SECONDARY VOLTAGE(S)	120
RATED V.A.	200
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	9.5 LBS

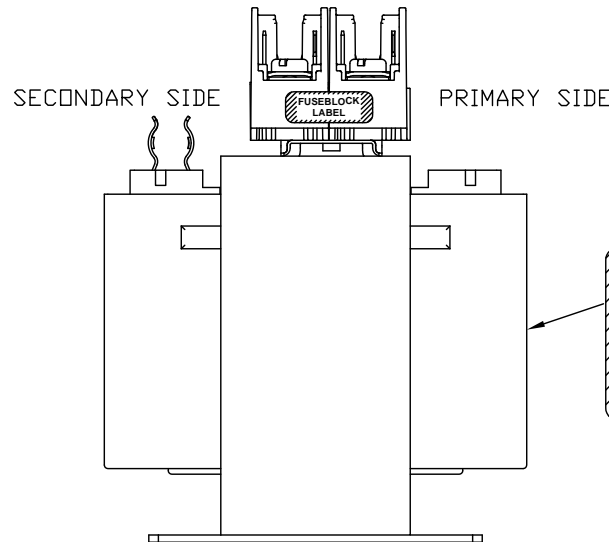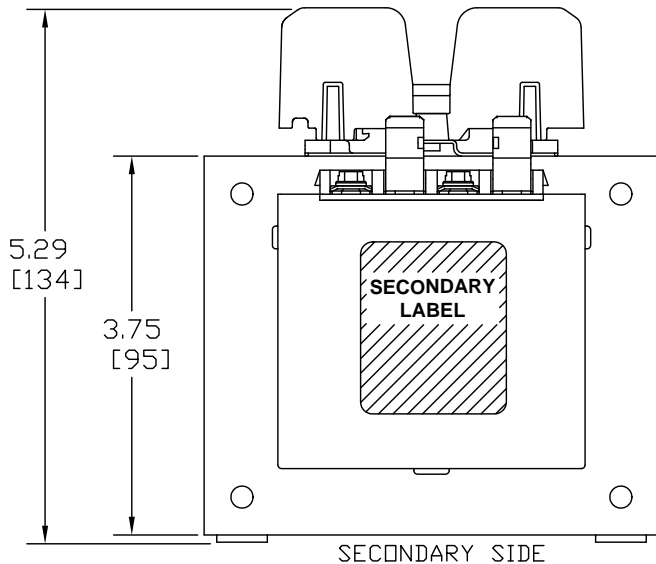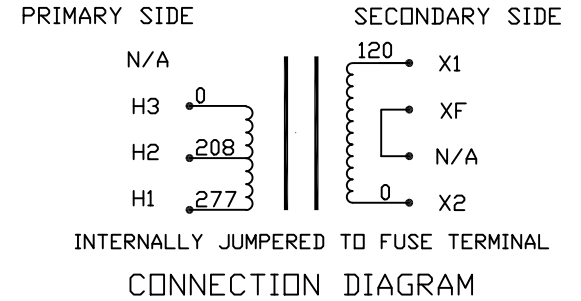

NOTES:

1. ALL MEASUREMENTS IN INCHES (MM)
2. TERMINAL SCREWS ARE COMBO #8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER.
3. 2 POLE, CLASS "CC" PRIMARY FUSE BLOCK, ACCOMMODATES TWO 13/32" X 1-1/2" CLASS "CC" FUSES.
4. SECONDARY FUSE CLIP ACCOMMODATES ONE 13/32" X 1-1/2" MIDGET FUSE.

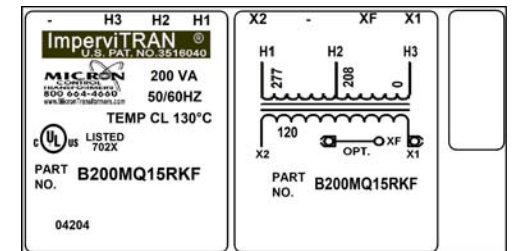

PACKAGED ACCESSORIES			
<p>MICRON CONTROL TRANSFORMER</p> <p>MICRON INDUSTRIES CORPORATION 1211 W. 22nd STREET, Suite 200, DAK BROOK, ILL. Tel. (800)664-4660, (630)516-1222 Fax (630)516-1820 www.MicronPower.com</p>			
DATE	1/22/20	DRAWN	JAW
RELEASE DATE		CHECKED	
		APPROVED	
MICRON PART NO.	B200MQ15RKF A3	CUSTOMER PART NO.	B200MQ15RKF B3
A	I3 CONSTRUCTION	AN006508	JW 1/22/20
ECL	REVISIONS	BY	DATE
SIZE	C	SCALE	NONE
			B200MQ15RKF